

ULTRA BASE SYSTEMS 5030 SEMINOLE BLVD. ST. PETERSBURG, FL 33708 PHONE: (866) 921-7888

FAX: (727) 391-9980 www.ultrabasesystems.com


INSTALLATION PROFILE ON COMPACTED SUBGRADE

Infill Material (optional)

Optional 1/2"(1.3cm) crown x 1"(2.5cm) stainless steel turf staple, approx. every 1' (30.5cm)

— Synthetic Turf

UltraBaseSystems MAX panel, 1" x 29.3" x 39.6" (2.5cm x 74.4cm x 100.6cm)

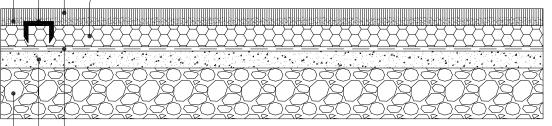

UltraBaseSystems Geosynthetic Stabilization Permeable or Impermeable Fabric

1"(2.5cm) to 2"(5.1cm) of Leveling Medium if needed, such as Crushed Stone

Existing Compacted Subgrade or Aggregate (with optional Soil Stabilizer)

NOTES:

- 1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
- 2. DO NOT SCALE DRAWING.
- 3. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS OR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
- 4. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



ULTRA BASE SYSTEMS® MAX PANEL

INSTALLATION PROFILE ON COMPACTED SUBGRADE